

Dry Back Mount Pressure, Vacuum & Compound Gauges



- A Durable Dry Type Utility Gauge for Commercial and Industrial Markets
- Suitable for Air, Water, Oil, Gas or Any Other Media Not Corrosive to Brass
- Other Connection Locations, Mounting Styles and Accessories Available

Specifications:

Available Dial Sizes: 1-1/2", 2", 2-1/2", 4-1/2"


Available Connection Sizes:

1/8" NPT on 1-1/2"

1/4" NPT on 2", 2-1/2", 4-1/2" Dial Sizes

- Black Steel Case, Chrome Plated Steel Bezel
- Copper Alloy Wetted Parts
- Polycarbonate Lens
- Accuracy 3-2-3 % of Span ASME B40.1 Grade B
- Ambient Temperature: -50°F to 160°F
- Dual Scale: PSI/Bar (X 100 = kPa) Standard
- Design Meets or Exceeds ASME B40.100 Pressure Gauge Standard

Range	Major Inc.	Minor Inc.
Vacuum Gauges		
30/0"VAC	5" hg	.5" hg
Compound Gauges		
30/0/30	10"hg / 10 psi	1"hg / 1 psi
30/0/60	10"hg / 10 psi	2"hg / 1 psi
30/0/100	30"hg / 20 psi	5"hg / 2 psi
30/0/150	30"hg / 20 psi	5"hg / 2 psi
30/0/300	30"hg / 50 psi	10"hg / 5 psi
Pressure Gauges		
0/15	2 psi	.1 psi
0/30	5 psi	.5 psi
0/60	10 psi	1 psi
0/100	20 psi	2 psi
0/160	20 psi	2 psi
0/200	40 psi	5 psi
0/300	50 psi	5 psi
0/400	50 psi	5 psi
0/600	100 psi	10 psi
0/1000	200 psi	10 psi
0/2000	400 psi	50 psi
0/3000	500 psi	50 psi
0/5000	1000 psi	100 psi

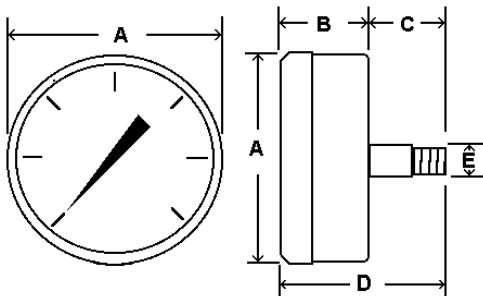

Dial Size	Pressure Gauges	Vacuum Gauges	Compound Gauges	A	B	C	D	E (MNPT)
1-1/2"	PSB15-PSI	VSB15-030	N/A	1.64	.93	.63	1.54	1/8"
2"	PSB20-PSI	VSB20-030	CGSB20-30PSI	2.07	1.03	.89	1.90	1/4"
2-1/2"	PSB25-PSI	VSB25-030	CGSB25-30PSI	2.50	1.17	.90	1.97	1/4"
4-1/2"	PSB45-PSI	N/A	N/A	4.50	1.31	.94	2.18	1/4"

Dimensions Shown in Inches

Available Pressure Ranges

- 1-1/2" & 2" 15, 30, 60, 100, 160, 200, 300, 400 & 600 psi
 2-1/2" Same Pressure Ranges As Above Plus 1000, 2000, 3000, and 5000 psi
 4-1/2" 30, 60, 100, 160, 200, and 300 psi